Alizé Series

Hot Air Venting Pellet Stoves

"A Modern Way to Enjoy in Old Style"

The Alizé series is designed for those who want to experience pellet heating and feel the heat of the flame. Alizé series products are designed for comfortable heating in your house.

The easy access panel on the front, cleaning mechanism which allows for cleaning without opening the door, high-efficiency aluminum heat fins is some of the features that stand out for high quality. The Alizé series is equipped with features far superior to those of its competitors. With the large integrated fuel tank, the fuel loading intervals are maximized.

Alizé Series stoves use ROBAX thermal glass with special heat resistance for safety purposes. Safety with child lock carries the Alizé series to the upper class.

With the easy-to-use cleaning arm, the moving grate extends the cleaning period without the need to open the front door. The Alizé series of products also consider the cleanliness of your home as much as your pocket.





Features



Advanced Control System An advanced central control system regulates the system constantly with the data provided by sensors.



Adaptive Air Feed The high-capacity fan ensures efficient combustion with precise regulation of system capacity and prevents gas leakage.



Sleek Design Alizé series products with their stylish design, adds coziness to your living room.



Easy Cleaning Easy ash removing with an ashtray.



Built-in Burner with Cleaning

Thanks to the patented grate cleaning system, the burner can be cleaned without opening the door that feature is not available in similar products.

temperature resistant ROBAX glass with a

door ensure top-level

second protection glass, and child lock on the

Extra Safety Pressure discharge

A



Good Endurance Large fuel tank for long operational hours.




Enhanced Performance

Alizé features specially extruded aluminum fins to maximize heat transfer generated in its combustion chamber.



Technical Specifications

TECHNICAL SPECIFICATION of ALIZE				ТҮРЕ	
			Unit	ALİZE 8	ALİZE 15
	Nominal - Minimum Heat Output		kW	8 - 2,4	15 - 4,5
CAPACITY			kcal/h	6.880 - 2.064	12.900 -3.870
	Combustion Efficiency, at Full Load		%	>90%	
OPERATING CONDITIONS	Fuel Type		-	Ø6 mm Premium Quality, EN Plus A1	
	Room Temperature Setting Range		°C	10-40	
	Max. Hot Air Flow Rate		m³/h	290	600
	Max. Heating Air Temperature		°C	130	130
	Electrical Connections		-	230 Vac , 50 Hz	
	Required Stack Draught (vacuum)		Pa	-10	
	Approximate Fuel Consumption	at full & partial load	kg/h	1,8 - 0,6	3,5 - 1,0
	Average Power Consumption	at full load	Watt	150	240
	Airborne Noise Level	at full load	dB	53	70
MAIN DIMENSIONS	Width, A		mm	540	
	Depth, B		mm	640	700
	Height, H		mm	880	1080
	Stack Diameter (Inner-Oouter), ØD1		mm	85 - 89	98 - 102
	Flue Gas Exit Connection	Position & Height, C & D	mm	398	- 318
	Air Inlet Diameter		inç	1 1/4"	
	Boiler Weight & Freight Weight		kg	150 - 175	167 - 192
	Freight Dimensions (width x depth x height)		mm	630 x 770 x 1000	630 x 830 x 1200
FUEL			lt	38	65
STORAGE			kg	25	45

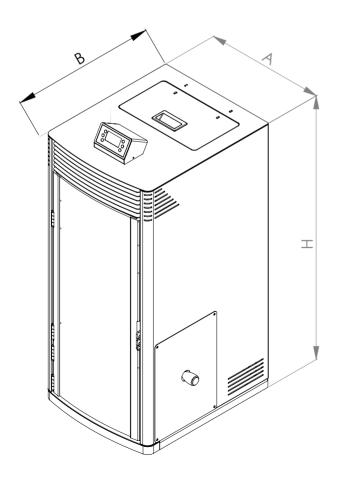

Highlights on the Features of Alizé:

- •Automatic ignition and auto pellet dosage,
- •Mechanical cleaning of burner grates,
- •Large internal fuel storage,
- •User friendly control system,
- •Unique software for regulation of combustion,
- •Combustion control via advanced sensors,
- Child lock on door,
- •Thermal resistant ROBAX® glass,
- •Protective second layer aesthetic glass,
- •Easy service & maintenance design,
- •Plug & Play easy installation with standard chimney size.

